


Technical Features


Air Top 2000 ST	
EC approval mark	e1*2001/56*0022*_
Heat output	0.9 - 2.0 kW
Fuel, Fuel consumption	Diesel, 0.12-0.24 l/h
Rated voltage	12 V
Rated power consumption	14-29 W
Flow rate of circulating pump (against 0.5 mbar)	78 m ³ /h
Dimensions (l x w x h)	311 x 120 x 121 mm
Weight	2.6 kg
Diameter air outlet	60 mm
Diameter exhaust	22 mm



For small boats with only one main cabin one non-closable outlet is fully sufficient.

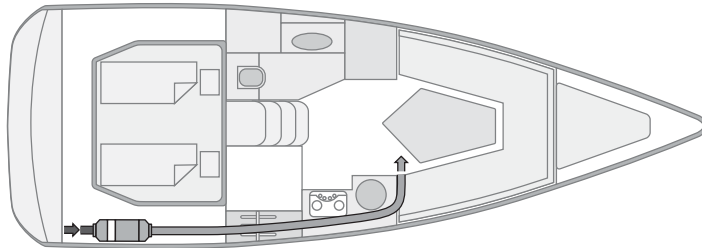

For this boat with two cabins and one head compartment one hot air outlet for each cabin is recommended. The main air duct should go into the salon and be non-closable.

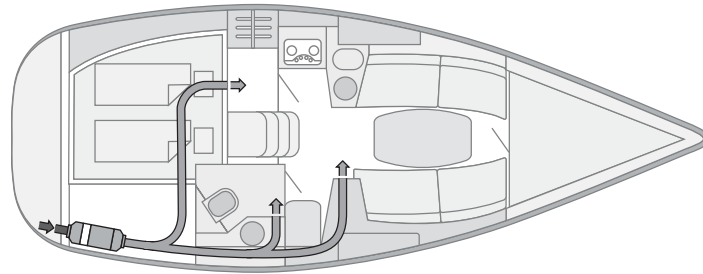

The advantages of Webasto's air heaters:

- Constant cosiness thanks to an electronic thermostat
- Short heating-up times thanks to effective output
- Low purchase price and cheap to run
- Available as a complete installation kit for quick and simple retrofitting
- Dehumidification of the cabins
- Quiet-running
- Simple to install
- Compact, space-saving design
- Meet current requirements and standards relating to boats
- Practical ventilation function

Air Top 2000 ST – quiet comfort

The quiet heater - the smallest air heater on the market. It offers excellent heat output and optimal economy.